

## Headquarters

### Otto Männer GmbH

Unter Gereuth 9–11  
79353 Bahlingen  
Germany  
Phone +49 (0) 7663 609-0  
Fax +49 (0) 7663 609-299  
info@maenner-group.com

## Europe

### Otto Männer GmbH

Unter Gereuth 9–11  
79353 Bahlingen  
Germany  
Phone +49 (0) 7663 609-0  
Fax +49 (0) 7663 609-299  
sales@maenner-group.com

### France, Switzerland (French speaking)

männer Solutions for Plastics  
Espace Entreprises  
Immeuble le Saint Amour  
71000 Macon Loché  
France  
Phone +33 (0) 3 85 32 65 32  
Fax +33 (0) 3 85 32 65 33  
sales@maenner-group.com

### United Kingdom/Ireland

Jeremy Pingstone  
38 Lawley Way  
Droitwich  
Worcestershire  
WR9 8FB, UK  
Phone +44 1905 770 868  
Fax +44 1905 797 166  
jeremy.pingstone@maenner-group.com

### Italy

Sverital S. p. A.  
Via S. Maria 108  
20093 Cologno Monzese, Mi  
Italy  
Phone +39 (02) 25 15 61  
Fax +39 (02) 25 39 10 55  
sverital@sverital.it

### Denmark/Sweden

H. Saxe Hansen A/S  
Walgerholm 17  
3500 Værløse  
Denmark  
Phone +45 (44) 977022  
Fax +45 (44) 975055  
info@hsh.as

## North America

### Manner USA, Inc.

1105 Progress Industrial Blvd.  
Lawrenceville, GA 30043  
USA  
Phone +1 770 449 1820  
Fax +1 770 449 1821  
sales-usa@maenner-group.com

## Asia

### Hong Kong

Manner Hong Kong Ltd.  
Suite No. 8B, 11/F, Tower 1  
China Hong Kong City, 33 Canton Road  
Tsim Sha Tsui, Kowloon, Hong Kong  
Phone +852 2345 12 81 / 2345 12 87  
Fax +852 2345 12 91  
sales-hongkong@maenner-group.com

### Shanghai

männer Solutions for Plastics (Shanghai)  
with Asia Solution Corporation  
Suite 2806 Hyundai Plaza,  
369 Xian Xia Rd.  
Changning District Shanghai,  
China, PC: 200336  
Phone +86 21 5217 7225  
Fax +86 21 5217 9434  
sales-shanghai@maenner-group.com

### Japan


Männer Japan Co., Ltd.  
30–8, Sumiyoshi-cho, Mito, Ibaraki  
310-0844 Japan  
Phone +81 29 212 33 41  
Fax +81 29 212 33 19  
sales-japan@maenner-group.com

## männer SLIMLINE Valve Gate Nozzle



### For Close-Quarter Installations

Fitting the maximum number of cavities within the smallest possible space – männer’s proven SLIMLINE nozzle meets this challenge to provide increasingly more compact, high-speed, high-cavitation systems for the production of complex small and medium-sized plastic parts. The valve gate nozzle features a slender design with a nominal nozzle diameter of only eight millimeters, making it especially well suited to applications with tight spacing or low accessibility. Now männer has further developed its proven SLIMLINE nozzle, applying these benefits to the production of industrial components made of engineered resins as well as semicrystalline or liquid crystalline thermoplastics. In identical installations, the svelte nozzle provides enhanced stability, ensuring a homogeneous temperature profile and, with it, gentle and reliable processing of sensitive plastic melts.

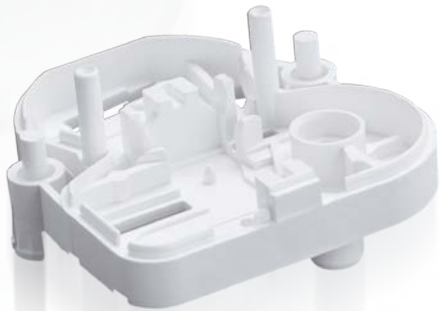

Cable connectors



Pistons



Plug housing



Sport Cap



Flat dripper  
for drip irrigation

# männer SLIMLINE

## Svelte Valve Gate Nozzle for Reliable Processing even of Engineered Resins

- Impeccable gate quality
- Short cycle times
- Reliable processing
- For tight cavity spacing, high-cavitation molds, and applications with tight spacing conditions such as direct injection close to the core or inner injection
- Homogeneous temperature profile even when processing engineered resins with narrow processing windows
- Basic nozzle body combined with nozzle tip specifically designed to meet the demands of processing engineered resins
- Insulating ring made of highly thermally insulating material
- Includes new temperature-control element (patent pending)
- Stable nozzle design made possible by stronger nozzle tube with no change to installation dimensions
- Includes extra valve pin guide ring
- Excellent thermal separation of the nozzles from the mold using specially integrated components
- Easy maintenance
- Available with nominal length of up to 204 mm



### Temperature-control element\* for homogeneous temperature profile

- Two functions in one: heating of nozzles and optimization of thermal balance
- Base shell made of highly heat-conductive alloy
- Two alternating slots enable easy installation and removal (chucking action)



\* Patent pending

## Technical Specifications

Suitable for	MSS (SINGLEDROP), MMS (MULTIDROP)
Nominal nozzle diameter (mm)	08
Length (mm)	79, 104, 129, 154, 179, 204
Examples of plastic types	Polyolefins (MFI 40-100), PP, PE, PE-LD, PE-HD, LCP, PBT, POM, PA, PS, ABS